

10.3 Gb/s SFP+ AOC

10G-S-AOCx

■ Product Features

- ✓ Truly broadband - operates from 1 to 10.5 Gb/s
- ✓ Support hot-pluggable
- ✓ Available in lengths from 1m to 50m
- ✓ 360 degree cable braid crimp and enhanced EMI skirt
- ✓ Excellent ESD protection
- ✓ Single 3.3V power supply
- ✓ RoHS Compliant and Lead-Free
- ✓ Compliant with SFF-8472 Rev 11.1
- ✓ Compliant with SFP+ MSA: SFF-8431 Rev4.1



■ Applications

- ✓ 1/10GbE
- ✓ 1/2/4/8x FC
- ✓ Infiniband 1X SDR DDR QDR
- ✓ Proprietary Interconnects

■ General

Passive cables may require host pre-emphasis and equalization to reach at the longer lengths.

■ Product Selection

Part Number	Lengths
10G-S-AOC1	1m
10G-S-AOC2	2m
10G-S-AOC3	3m
10G-S-AOC5	5m
10G-S-AOC7	7m
10G-S-AOC10	10m


10G-S-AOC15	15m
10G-S-AOC20	20m
10G-S-AOC25	25m
10G-S-AOC30	30m
10G-S-AOC40	40m
10G-S-AOC50	50m

*For availability of additional cable lengths, please contact Fiberend.

■ Pin Descriptions

Pin	Symbol	Name/Description	Ref.
1	VeeT	Transmitter Ground (Common with Receiver Ground)	
2	TX Fault	Transmitter Fault. LVTTTL-O	
3	TX Disable	Transmitter Disable. Laser output disabled on high or open. LVTTTL-I	
4	SDA	2-Wire Serial Interface Data Line(Same as MOD-DEF2 in INF-8074i). LVTTTL-I/O	
5	SCL	2-Wire Serial Interface Data Line(Same as MOD-DEF2 in INF-8074i). LVTTTL-I	
6	Mod_ABS	Module Absent, Connect to VeeT or VeeR in Module.	
7	RS0	Rate Select 0, optionally controls SFP+ module receiver LVTTTL-I	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation. LVTTTL-O	
9	RS1	Rate Select 1, optionally controls SFP+ module transmitter. LVTTTL-I	
10	VeeR	Receiver Ground (Common with Transmitter Ground)	
11	VeeR	Receiver Ground (Common with Transmitter Ground)	
12	RD-	Receiver Inverted DATA out. AC Coupled. CML-O	
13	RD+	Receiver Non-inverted DATA out. AC Coupled. CML-O	
14	VeeR	Receiver Ground (Common with Transmitter Ground)	
15	VccR	Receiver Power Supply	
16	VccT	Transmitter Power Supply	

17	VeeT	Transmitter Ground (Common with Receiver Ground)	
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled. CML- I	
19	TD-	Transmitter Inverted DATA in. AC Coupled. CML- I	
20	VeeT	Transmitter Ground (Common with Receiver Ground)	

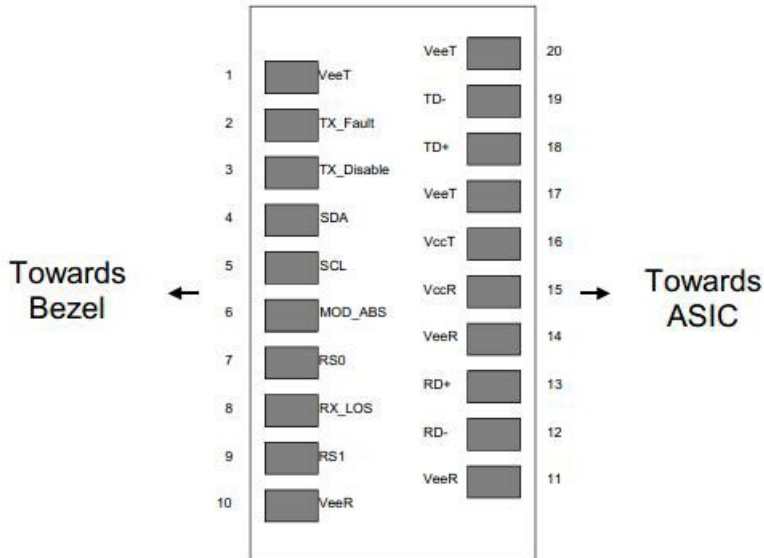

Pin-out of Connector Block on Host Board

■ Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Maximum Supply Voltage	Vcc	-0.5		+4.0	V	
Storage Temperature	TS	-40		+85	°C	
Operating Humidity	RH	0		85	%	

■ Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Power Supply Voltage	Vcc	3.13	3.30	3.47	V	
Power Supply Current	Icc			140	mA	One side
Case Operating Temperature	Tc	0		+70	°C	

■ Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)


Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Data Rate	BR	1	10.3	10.5	Gbps	
Transmitter						
Input differential impedance	Rin	90	100	110	Ω	
Differential data input swing	Vin, pp	100		1000	mV	
TX Disable-High		2		Vcc+0.3	V	
TX Disable-Low		Vee		Vee+ 0.8	V	
TX Fault-High		2		Vcc+0.3	V	
TX Fault-Low		Vee		Vee+0.8	V	
Receiver						
Rx Output Diff Voltage	Vout, pp	-	600	800	mV	
Rx Output Diff Impedance	Zo	90	100	110	Ω	
LOS-High		2		Vcc+0.3	V	
LOS-Low		Vee		Vee+0.8	V	

■ Mechanical Specifications

Cable Mechanical Specifications	Min	Typical	Max	Units
Minimum bend radius	60			mm
Minimum bend radius within 100 mm of a module end	105			mm
Diameter of cable jacket	1.8	2.0	2.2	mm

■ EEPROM Information

EEPROM memory map specific data field description is as below:

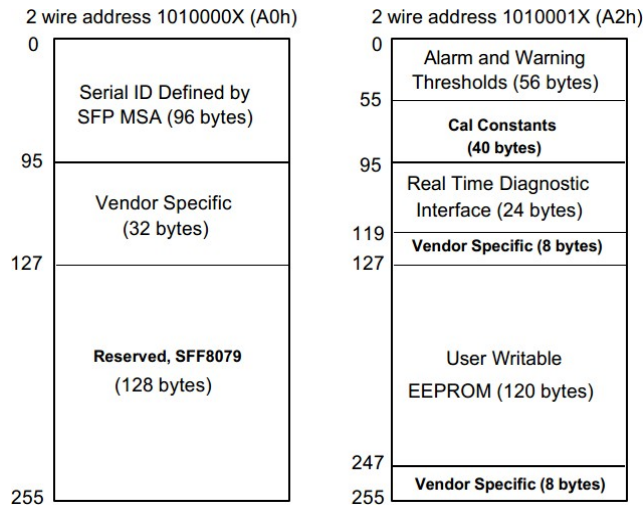

■ Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.7
- Immunity compatible with IEC 61000-4-3
- EMI compatible with FCC Part 15 Class B EN55022 Class B
- ROHS compliant with ROHS 2 (2011/65/EU)